PTV BALLOON
SIMVALVE FLEX

Superior Balloon

- This model has a **low-profile** balloon and shaft which makes it possible to use the lowest introducer sheath at structural heart procedures
- The coaxial shaft design provides enhanced pushability combined with a **flexible** distal tip for optimum steerabillity.

Key Features

- Fits smallest introducer system with its low profile design
- Advanced balloon folding enables low profile re-wrap for easier withdrawal after dilatation
- Rapid inflation and deflation times by shaft design optimization
- Engineered coaxial shaft for better trackability and pushability
- Short and soft catheter tip for safe procedures
- Wide size range from 4 mm to 30 mm for diameter

Technical Specifications

CATHETER TYPE:	OVER-THE-WIRE (OTW)
USABLE CATHETER LENGTH (CM):	100
BALLOON MATERIAL:	NYLON 12
BALLOON FOLDS:	4-6 MM: 3 FOLDS 7-12 MM: 6 FOLDS 14-30 MM: 8 FOLDS

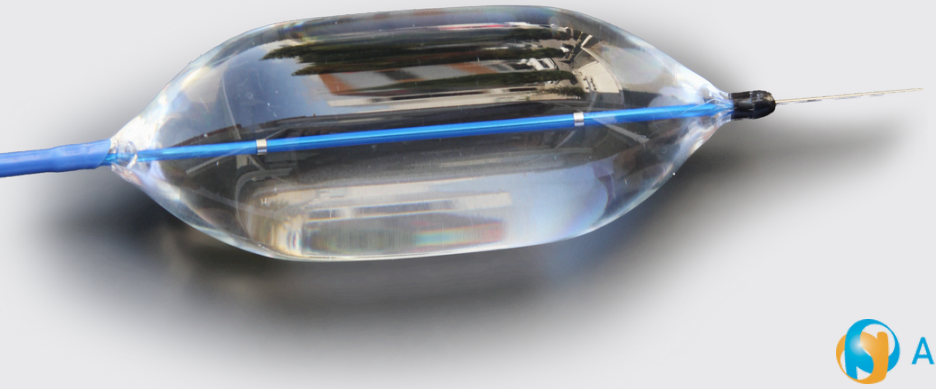

Angiopro

PTV BALLOON
SIMVALVE FLEX

Balloon diameter (mm)	Balloon length (mm)					Nominal pressure (atm)	RBP (atm)	Guide Wire (inch)	Introducer sheath (Fr)	Shaft size (Fr)
	20	30	40	50	60					
12	SVX1220	SVX1230	SVX1240	SVX1250	SVX1260	3	5	0.035"	6	6,5
14	SVX1420	SVX1430	SVX1440	SVX1450	SVX1460	3	4	0.035"	7	6,5
16	SVX1620	SVX1630	SVX1640	SVX1650	SVX1660	3	4	0.035"	7	6,5
18	SVX1820	SVX1830	SVX1840	SVX1850	SVX1860	2	3	0.035"	8	6,5
20	SVX2020	SVX2030	SVX2040	SVX2050	SVX2060	2	3	0.035"	8	6.5
22	SVX2220	SVX2230	SVX2240	SVX2250	SVX2260	2	3	0.035"	8	6.5
24	SVX2420	SVX2430	SVX2440	SVX2450	SVX2260	2	3	0.035”	9	9
26	SVX2620	SVX2630	SVX2640	SVX2650	SVX2660	2	3	0.035”	9	9
28	SVX2820	SVX2830	SVX2840	SVX2850	SVX2860	2	3	0.035”	9	9
30	SVX3020	SVX3030	SVX3040	SVX3050	SVX3060	2	3	0.035”	10	9

Angiopro

Angiopro Vertriebs- und Service GmbH
Heydenreichstr. 5 I 67346 Speyer
Phone: 06232 291691 I E-Mail: kontakt@angiopro.de

Commercial Register: HRB 52721 | **Register Court:** Ludwigshafen am Rhein
Represented by: Hanns-Joachim Rieck and Benjamin Rieck

CE

Please consult the IFU on our website for full risk and safety information.